

# PPE TEST REPORT

Report No.: MOS2003209960S

Page 1 of 8

**Client company** : Haining jinbaili Socks Co.,Ltd.  
**Client address** : No.88, Tanqiao Hanlin Road, Yuanhua Town,Haining, ZhejiangProvince, China  
**Manufacturer** : Haining jinbaili Socks Co.,Ltd.  
**Address** : No.88, Tanqiao Hanlin Road, Yuanhua Town,Haining, ZhejiangProvince, China

Report on the submitted samples said to be:

**Sample Name** : mask  
**Trade Mark** : N/A  
**Model** : C-mask, Willow leaf mask  
**Sample Receiving Date** : March 16, 2020  
**Testing Period** : March 16, 2020 ~ March 23, 2020  
**Results** : Please refer to next page(s).



\*\*\*\*\*  
**Summary of Test Results:**

**TEST REQUEST**

**CONCLUSION**

A EN 149:2001+A1:2009 Respiratory protective devices - Filtering half masks to protect against particles - Requirements, testing, marking

**Pass**

\*\*\*\*\*  
Signed for and on behalf of MOSEN

Tested By:

*Mery*

Mery Li

Approved by:

*Sady*

Sady Xu

# PPE TEST REPORT

Report No.: MOS2003209960S

Page 2 of 8

Property	Principle / Requirements	Result
Classification	Particle filtering half masks are classified according to their filtering efficiency and their maximum total inward leakage. There are three classes of devices: FFP1, FFP2 and FFP3.	Pass FFP2
Designation	Particle filtering half masks meeting the requirements of this European Standard shall be designated in the following manner: Particle filtering half mask EN 149, year of publication, classification, option (where "D" is an option for a non re-useable particle filtering half mask and mandatory for re-useable particle filtering half mask).	Pass
Nominal values and tolerances	Unless otherwise specified, the values stated in this European Standard are expressed as nominal values. Except for temperature limits, values which are not stated as maxima or minima shall be subject to a tolerance of $\pm 5\%$ . Unless otherwise specified, the ambient temperature for testing shall be (16 - 32) °C, and the temperature limits shall be subject to an accuracy of $\pm 1^\circ\text{C}$ .	Pass. +5°C to+38°C.
Visual inspection	The visual inspection shall also include the marking and the information supplied by the manufacturer.	Pass
Packaging	Particle filtering half masks shall be offered for sale packaged in such a way that they are protected against mechanical damage and contamination before use. The visual inspection is carried out where appropriate by the test house prior to laboratory or practical performance tests.	Pass
Material	A breathing machine is adjusted to 25 cycles/min and 2,0 l/stroke. The particle filtering half mask is mounted on a Sheffield dummy head. For testing, a saturator is incorporated in the exhalation line between the breathing machine and the dummy head, the saturator being set at a temperature in excess of 37°C to allow for the cooling of the air before it reaches the mouth of the dummy head. The air shall be saturated at $(37 \pm 2)^\circ\text{C}$ at the mouth of the dummy head. In order to prevent excess water spilling out of the dummy's mouth and contaminating the particle filtering half mask the head shall be inclined so that the water runs away from the mouth and is collected in a trap.	Pass. Melt blown filter
Cleaning and	If the particle filtering half mask is designed to be	Pass



# PPE TEST REPORT

Report No.: MOS2003209960S

Page 3 of 8

disinfecting	<p>re-usable, the materials used shall withstand the cleaning and disinfecting agents and procedures to be specified by the manufacturer.</p> <p>Testing shall be done in accordance with 8.4 and 8.5. With reference to 7.9.2, after cleaning and disinfecting the re-usable particle filtering half mask shall satisfy the penetration requirement of the relevant class.</p> <p>Testing shall be done in accordance with 8.11.</p>	
Practical performance	<p><b>Walking test</b> The subjects wearing normal working clothes and wearing the particle filtering half mask shall walk at a regular rate of 6 km/h on a level course. The test shall be continuous, without removal of the particle filtering half mask, for a period of 10 min.</p> <p><b>Work simulation test</b> The individual activities shall be arranged so that sufficient time is left for the comments prescribed.</p>	<p>Pass. The particle filtering half mask could undergo practical performance tests under realistic conditions.</p>
Finish of parts	<p>Parts of the device likely to come into contact with the wearer shall have no sharp edges or burrs.</p> <p>Testing shall be done in accordance with 8.2.</p>	<p>Pass. No sharp edges and burrs.</p>
Total inward leakage	<p>1) walking for 2 min without head movement or talking; 2) turning head from side to side (approx. 15 times), as if inspecting the walls of a tunnel for 2 min; 3) moving the head up and down (approx. 15 times), as if inspecting the roof and floor for 2 min; 4) reciting the alphabet or an agreed text out loud as if communicating with a colleague for 2 min; 5) walking for 2 min without head movement or talking.</p> <p>The leakage P shall be calculated from measurements made over the last 100 s of each of the exercise periods to avoid carry over of results from one exercise to the other.</p>	<p>Total inward leakage is 9%.</p>
Penetration of filter material	<p>The device shall be mounted in a leaktight manner on a suitable adaptor and subjected to the test(s), ensuring that components of the device that could affect filter penetration values such as valves and harness attachment points are exposed to the challenge aerosol.</p> <p>Testing of penetration, exposure and storage shall be done in accordance with EN13274-7.</p>	<p>Pass The penetration of paraffin oil test is 4%. The penetration of sodium chloride test is 3.3%.</p>
Compatibility with skin	<p>Materials that may come into contact with the wearer's skin shall not be known to be likely</p>	<p>Pass. Inner and out layer:</p>



# PPE TEST REPORT

Report No.: MOS2003209960S

Page 4 of 8

	<p>to cause irritation or any other adverse effect to health.</p>	<p>Nonwoven pet fabric</p>
<p>Flammability</p>	<p>The facepiece is put on a metallic dummy head which is motorized such that it describes a horizontal circle with a linear speed, measured at the tip of the nose, of <math>(60 \pm 5)</math>mm/s.</p> <p>The head is arranged to pass over a propane burner the position of which can be adjusted.</p> <p>By means of a suitable gauge, the distance between the top of the burner, and the lowest part of the facepiece (when positioned directly over the burner) shall be set to <math>(20 \pm 2)</math> mm.</p> <p>With the head turned away from the area adjacent to the burner, the propane gas is turned on, the pressure adjusted to between 0,2 bar and 0,3 bar and the gas ignited. By means of a needle valve and fine adjustments to the supply pressure, the flame height shall be set to <math>(40 \pm 4)</math> mm. This is measured with a suitable gauge. The temperature of the flame measured at a height of <math>(20 \pm 2)</math> mm above the burner tip by means of a 1,5 mm diameter mineral insulated thermocouple probe, shall be <math>(800 \pm 50)^{\circ}\text{C}</math>.</p> <p>The head is set in motion and the effect of passing the facepiece once through the flame shall be noted.</p> <p>The test shall be repeated to enable an assessment to be made of all materials on the exterior of the device. Any one component shall be passed through the flame once only.</p>	<p>Pass.</p> <p>The particle filtering half mask does not to continue to burn for more than 5 s after removal from the flame.</p>
<p>Carbon dioxide content of the inhalation air</p>	<p>For this test the particle filtering half mask shall be fitted securely in a leak-tight manner but without deformation to a Sheffield dummy head (see Figure 6).</p> <p>Air shall be supplied to it from a breathing machine adjusted to 25 cycles/min and 2,0l/stroke and the exhaled air shall have a carbon dioxide content of 5 % by volume.</p> <p>The CO<sub>2</sub> is fed into the breathing machine via a control valve, a flowmeter, a compensating bag and two non-return valves.</p> <p>Immediately before the solenoid valve a small quantity of exhaled air is preferably continuously withdrawn through a sampling line and then fed into the exhaled air via a CO<sub>2</sub> analyser.</p> <p>To measure the CO<sub>2</sub> content of the inhaled air, 5 % of the stroke volume of the inhalation phase of the breathing</p>	<p>Pass.</p> <p>The carbon dioxide content of the inhalation air (dead space) does not exceed an average of 1,0 %</p>



# PPE TEST REPORT

Report No.: MOS2003209960S

Page 5 of 8

	<p>machine is drawn off at the marked place by an auxiliary lung and fed to a CO<sub>2</sub> analyser. The total dead space of the gas path (excluding the breathing machine) of the test installation should not exceed 2000 ml.</p> <p>Measure the carbon dioxide content of the inhaled air and record continuously.</p>	
Head harness	<p>The head harness shall be designed so that the particle filtering half mask can be donned and removed easily.</p> <p>The head harness shall be adjustable or self-adjusting and shall be sufficiently robust to hold the particle filtering half mask firmly in position and be capable of maintaining total inward leakage requirements for the device.</p>	Not applicable
Exhalation valve(s)	<p>A particle filtering half mask may have one or more exhalation valve(s), which shall function correctly in all orientations.</p> <p>Exhalation valve(s), if fitted, shall continue to operate correctly after a continuous exhalation flow of 300 l/min over a period of 30 s.</p> <p>When the exhalation valve housing is attached to the faceblank, it shall withstand axially a tensile force of 10 N applied for 10s.</p>	Pass
Breathing resistance	<p>Seal the particle filtering half mask on the Sheffield dummy head. Measure the exhalation resistance at the opening for mouth of the dummy head using the adapter shown in Figure 6 and a breathing machine adjusted to 25 cycles/min and 2.0l/stroke or a continuous flow 160l/min. Use a suitable pressure transducer.</p> <p>Measure the exhalation resistance with the dummy head successively placed in 5 defined positions:</p> <ul style="list-style-type: none"> <li>facing directly ahead</li> <li>facing vertically upwards</li> <li>facing vertically downwards</li> <li>lying on the left side</li> <li>lying on the right side</li> </ul> <p>Test the inhalation resistance at 30 l/min and 95 l/min continuous flow.</p> <p>The breathing resistances apply to valved and valveless particle filtering half masks and shall meet the requirements</p>	<p>Pass.</p> <p>Inhalation resistance at 30 l/min: &lt;0.7mbar.</p> <p>Inhalation resistance at 95 l/min: &lt;2.4mbar.</p> <p>Exhalation resistance at 160 l/min: &lt;3.0mbar.</p>
Clogging	<p>Convey dust from the distributor to the dust chamber where it is dispersed into the air stream of 60 m /h.</p> <p>Fit the sample particle filtering half mask in a leaktight manner to a dummy head or a suitable filter holder located in the dust chamber. Connect the breathing machine and</p>	Not applicable

# PPE TEST REPORT

Report No.: MOS2003209960S

Page 6 of 8

	<p>humidifier to the sample and operate for the specified testing time.</p> <p>The concentration of dust in the test chamber may be measured by drawing air at 2 l/min through a sampling probe equipped with a pre-weighed, high efficiency filter (open face, diameter 37 mm) located near the test sample, as shown in Figure 10.</p> <p>Calculate the dust concentration from the weight of dust collected, the flow rate through the filter and the time of collection.</p>	
Demountable parts	All demountable parts (if fitted) shall be readily connected and secured, where possible by hand.	Not applicable

NA = Not Applicable

\*\*\*\*\*




# PPE TEST REPORT

Report No.: MOS2003209960S

Page 7 of 8

## Appendix

Photograph of Sample

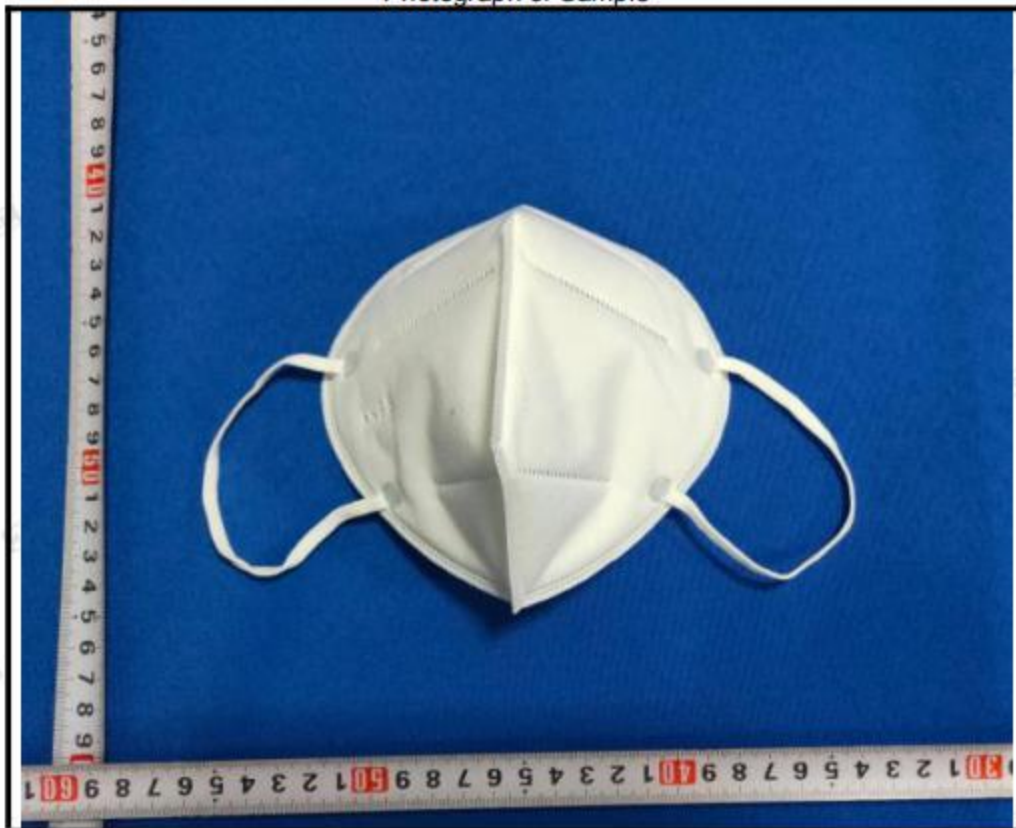

# PPE TEST REPORT

Report No.: MOS2003209960S

Page 8 of 8



MOSEN authenticate the photo on original report only

\*\*\* End of Report \*\*\*