




# VAPOR BARRIER YELLOW™

10 & 15 MIL VAPOR BARRIERS

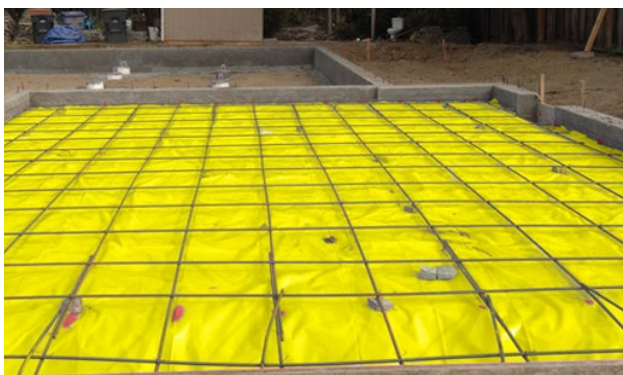

## PRODUCT DESCRIPTION

Vapor Barrier Yellow 10 and 15 mil poly is a high performance, polyolefin based, below slab vapor barrier. It is manufactured with state of the art polyolefin resins specifically designed to ensure low permeability, high tensile strength, and superior puncture resistance.

## APPLICATIONS

- ▶ Vapor Barrier
- ▶ Underslab Vapor Barrier
- ▶ Wall Vapor Barrier
- ▶ Foundation Wall Barrier

## PRODUCT USE

Vapor Barrier Yellow is designed to suppress the transmission of water vapor penetration through concrete slabs on grade. It is also an effective product for impeding vapor migration to reduce mold, mildew, and fungus from penetrating the concrete foundation walls.

## SIZE AND PACKAGING

#VBY10 | 10 mil roll size: 14' x 210'

#VBY15 | 15 mil roll size: 14' x 140'

PROPERTIES	TEST DIRECTION/ TEST METHOD	10 MIL VALUES	15 MIL VALUES
Tensile Strength	ASTM E 154	61 lbs	80 lbs
Puncture Resistance	ASTM D 1709, Method B	3210 grams	3930 grams
Water Vapor Transmission	ASTM F 1249	0.0228 perms	0.0158 perms
Chemical Resistance	ASTM 154	unaffected	unaffected
Roll Dimensions	-	14' x 210'	14' x 140'
Roll Weight	-	141 lbs	141 lbs

Exceeds ASTM E 1745 Class A, B, & C

The information provided herein is based upon data believed to be reliable. All testing is performed in accordance with ASTM standards and procedures. All values are typical and nominal and do not represent either minimum or maximum performance of the product. Although the information is accurate to the best of our knowledge and belief, no representation of warranty or guarantee is made as to the suitability or completeness of such information. Likewise, no representation of warranty or guarantee, express or implied, or merchantability, fitness or otherwise, is made as to product application for a particular use.

T.000000.080618